


ř	<del></del>		Panel No.	AutoPicture <sup>TM</sup> Control26	Basic Remote Operation3	Basic Television Operation3	Cable/Cable Box Basic Connection 1	Closed Caption Control	- 1	П	Limited Warranty32	Onscreen Menu Navigation10	Picture Menu Controls	QuadraSurf <sup>TM</sup>	Remote Batteries	Remote Control Button Descriptions8-9	Sleeptimer25	Sound Menu Controls
<b>7</b> 9	PANEL 32			.: lotte	eration	Operation	Basic Cc	ontrol	ocations	rols	:	lavi gatio	trols			utton De		rols
22	31	J		AutoPicture <sup>TM</sup> Control	emote Op	levision (	able Box	Caption C	Service L	Install Menu Controls	Warranty	n Menu N	Menu Cor	.: Magan	Batteries	Control B	ier	fenu Con fenu Cont
. 23	30	INDEX	Subject	AutoSou	Basic Ro	Basic Te	Cable/C	Closed	Factory	Install	Limited	Onscree	Picture ?	QuadraS	Remote	Remote	Sleeptin	Sound N Timer N
.23	PANEL 29	PANEL INDEX	Panel No.	5	4	2		5	2	9		8	30	61	30	21	: 33	
	PANEL 28	Ë	Pan	-			Jacks								sta			M
71	PANEL 27			Connections	S	System .	deo Input	::	t Jacks	Jacks	ntrols		mels	s	ced Cham		Options	AutoLock
			Subject	Antienna Basic Connection	AV1 Input Jacks	External Audio System	Front Audio/Video Input Jacks	Headphone Jack	Monitor Output Jacks	S-Video Input Jacks	AutoLock <sup>TM</sup> Controls	Access Code	Block All Channels	Block Channels	Clear All Blocked Chamels	Movie Ratings	Other Blocking Options	TV Ratings




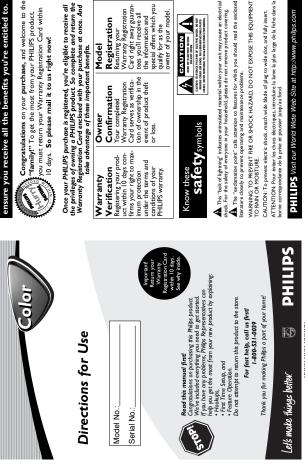

BASIC TV AND REMOTE OPERATION

FRONT AUDIO/VIDEO INPUT CONNECTION





 $\sim$ 

Remote State Witten

Pressing both buttons at the same fine will display the on-secret mean. Once in the mean, use these button to make adjustments or selections.

Spess the CHANNE UP A or DOWN Y button to select TV channels.


RENOTE CONTROL


Paint the remote control toward the remote control toward the remote sensor window on the FUV when operating the TV with the remote.


Press the POWER button to unthe TYON.


Note: You can also press my button on the front of the TV to un the FYO.


Press the VOLIVIE: button to press the vound level, or the VOLIVIE: button to lower the sound level.














other in the pattern - Press the mare batton to eliminate the sound behaved from the TV. "WITPE" will be deplayed on the TV's screen. Press again to exclor the TV's volume to it's previous level.


16 • NUMBERED (or Button - Press the mankered batton to select TV channel or it mankered batton to select TV channels or to ener extra notine with the or exerce mean. For stage channel or the channel you desire, the TV will have for the channel you desire, the TV will have for meet of meet channel you desire, the TV will have for meet channel you desire, the TV will have deen claimed.




REMOTE CONTROL BUTTON DESCRIPTIONS	11 - STATUS/EXIT Button - Peas to display the current channel munber. If the onscreen menu is displayed, press the Status/Exit button will remove it from the TV's screen.	12 - CURSOR A,V,<, or> Buttons - Press to navigate, select and adjust controls within the on-screen menu.	13 - VOL(ume) + or – Buttons - Press the VOL + button to increase the TV's sound level. Press the VOL – button to decrease the TV's sound level.
REMOTE CONTROL	ton - Press the Power button or off. URF Buttons - (Red, ue) Allows you to store and	nels for each colored button.  ton - Press to add channels n". lists. Works with all col-	button - Allows you to rels within the "Quadra Surf"




Be sure to set the TV for the type sig- mal you've connected (see the "Tuner Mode" section of this manual.) For the connection shown on the panel, choose the ANTENNA or AUTO option within the Tuner Mode Courted.  To set the TV to select only the chan- nel mathesis in your areas bow to rely magning or "Add channels in the "Program" or "Add channels in the TV's memory, see the Auto Program	Be sure to set the TV for the type sig. In all you've connected (see the "Tuner Motel" section of this mental.) For the connection show on this punel, those the AN IPRIN An AN AND Option within the Tuner Mode Countal. To set the TV to select only the chan- the selection of the TV to select only the chan- the property of the Anna And Chaume's into the TV's memory, see the Anto Program TV's memory, see the Anto Program TV's memory, see the Anto Program
the connection shown on this panel, choose the ANTENN Aor AUTO option within the Tuner Mode Countil.  Countil To set the TV to select only the channel and the Mode Countil to set the TV to select only the channel are more asset how to not amounted in your access the world rehambles in your access the world rehamble in your access the World Channels in the TV's memory, see the Auto Program	the connection shown on this panel, choose the ANTERNA or AUTO options within the Tuner Mode Courts.  To set the TV to select only the channel in the manners in your areas see how to not harmbest in your areas see how to a few months, see the see see how to a few months, see the see see how to a few months, and channels in the TV's memory, see the Auto Program section of this mannal.
To set the TV to select only the chan- nel numbers in your area see how to "Program" or "Add" channels in the TV's memory, see the Auto Program	To set the TV to select only the chan- nel numbers in your area see how to "Program" or "Add" channels in the TV's mentory, see the Auto Program section of this manual.
	Section of this manual.
section of this manual.	





۵۲(@)




an internal or exter the steps below to co.	If your Antenn cable (75 ohm)	connect to the T If your antenna wire (300 ohm)	attach the anten screws on a 300	2 Connect the An	page on me 1 v.	НЕГРЕ	Be sure to set the T	nal you've connecte
	I	Back of TV	aloke	lignal 75.0			Round Cable	











BASIC CABLE/CABLE BOX CONNECTIONS

IMPORTANT SAFETY INSTRUCTIONS
Read before operating equipment





Back of TV  Company Signal  Signal	Cable Box		
If your Cable TV signal is a round cable TV signal is a round cable (75 dun) then you're ready to compare to the tV.  If you'll have a Cable Convertor.  If you'll have a Cable Convertor to the tV.  If you'll have a Cable Convertor to the tV.  If you'll have a Cable Convertor to the tV.  If you'll have a Cable Signal IN(put) plug on the Convertor.	7 Tonner the Chele Tr cable to the Try Stg plug on the TV. If you have a Cable Converter Box Connect the OUT(put) plug from the Converter to the 752 plug on the TV.  HELPPUL HINT	Be sure to set the TV for the type sig- nal you've connected (see the "Tuner Mode" section of this manual.) For the connection shown on this panel, choose the CABLE or AUTO option within the Tuner Mode Control.	To set the TV to select only the chan- nel numbers in your area see how to "Program" or "Add" channels in the TV's memory, see the Auto Program section of this manual.





"Program" or "Ad	TV's memory, see

Example of Antenna Grounding as per NEC - National Electric Cod

The state of the s

CAUTION

Rev e surring secon

Course of terring secon

Course of terrin

Know these **Safety** symbols

Note to the CATV system installer:
This reminder is provided to call the CATV
system installer's starenoin to Article 803-40
of the RMC star provides guideline forproper grounding and, in particular, specifies
that the calle ground rall bus connected to
the grounding system of the building, as
close to the point of cable entry as practical.

k, match wide blade of plug to wide slot, and fully insert. electriques, introduire la lame la plus large de la fiche dans la postesse interior, so fond

PHILIPS Visit our World Wide Web Site at http:/

If your Antenna  If your Antenna  cable (75 ohm) the connect to the TV  If your antenna wire (300 ohm), 3	attach the anterna screws on a 300 t  Connect the Ante 2 300 to 75 ohm ada plug on the TV.	HELPFUI	Be sure to set the TV nal you've connected Mode" section of this
Back of TV	Cohe Span		Cable Box 75Ω

	Back of TV	Signal Signal Code Inc. Note Inc. No	
the connection to	V signal is a ohm) then you're to the TV.  Cable Converter Cable TV signal at IN(put) plug on	e TV cable to the V. He Converter Box: put) plug from the S22 plug on the TV.	for the type sig- (see the "Tuner manual.) For

An important spirit out a fit plig has been changing up to out a fit plig has been changing the control of the plane so the change of the plane so the change of the plane so that the changing the plane spirit of the changing t

for the mission.

In the description of the descrip


Congratulations on your purchase, and welcome to the "farnily" to get the energy from your PHILIS product, you must return your Warranty Registration Card within 10 days. So please mail it to us right now!

Return your Warranty Registration Card today to usure you receive all the benefits you're entitled to.











Cohe Signal Signal Signal	Cashe Box		
/ signal is a ohm) then you're to the TV.  ble Converter Cable TV signal	V.  V.  le Converter Box: put) plug from the SQ plug on the TV.	for the type sig- (see the "Tuner manual.) For on this panel,	e Control. t only the chan- rea see how to charmels in the








14 - CH(annel) + or - Buttons - Press to select channels in according or descending order.




17 - SLEEP Button - Press the Sleep button to set the TV to automatically turn itself off after a set period of time. Press repeatedly to select 15, 30, 45, 60, 90, 120, 180, or 240 minutes.

18 - CLOCK Button - Press to display the "Timer" menu when in the TV mode. Within this menu set the time, set the TV to tume to a certain channel at a certain time once, or daily

Back of TV	6	66 - 00 - 90 - 90		(refer to panel 3 for proper connection)
	Video Cables	00		2nd VCR with Audio and Video Input Jacks
-bro-	w Jut er end second	And Monitor the	insert ady to on the	



4



THE PICTURE MENU CONTROLS

THE INSTALL MENU CONTROLS

IIGATE THE ONSCREEN MENU

I 0 HOW TO NAW

REMOTE CONTROL BUTTONS

6

All the AV channels can be selected by pressing the Channel + or – buttons. The AV channels can also be added to the QuadraSurf<sup>TM</sup> buttons for quick access.

HELPFUL HINT

- 2-AA Batterio

1. Remove the battery compartment lid on the back of the remote. 2. Place the batteries (2-AA) in the remote. Be sure the (+) and (-) ends of the batteries line up correctly (inside of case is marked.)

o load the supplied batteries remote:

- Battery Lid

Reattach the battery lid

Your TV has several control to help with the first-time setup. These con-trols are found within the INSTALL onscreen sub menu.

THE SOUND MENU CONTROLS

					_
BASS BOOST CONTROL - Press the CUROSR RIGHT or LEFT buttons to teggle this control ON or	OFF. The BASS BOOST Control enhances the low frequencies.	<b>BALANCE CONTROL - Press</b> The CUROSR RIGHT or LEFT buttons	to adjust the sound level between the right and left speakers.	AVL CONTROL - Press the CUROSR RIGHT or LEFT buttons to	sound level will remain more consistent during program changes or commercial breaks.
	Ou	5 6	5 8	5	
	_		trast+		

CONTRAST + CONTROL Press the CURS RIGHT or LEFT
buttors to tagge the control On or
OFF The Contrast + control helps to
"shapen" the pieture quality. The
back portions of the pieture become
icher in datenes and his whites
become higher.

CUROSR RIGHT or LEFT buttons until lightest parts of the preture show good detail.

English or Español

TUNER MODE CONTROL

TUNER MODE CONTROL

An in input to either AVTENNA;

CASE LE O AVITOR mode, in the
AVITO mode, when the AVITO mode, when the AVITO

TWO MINISTER OF THE CONTROL OF THE

Man - Lropupo - Pitro Lropupo - Sand Ture Maio - Fietam - AtoProgram - Fretam - Cremit Dit

2 Press the CURSOR UP or DOWN buttons on the remote to pick any of the onscreen menus.

**©** 

Press the MENU button on the remote control to show the onser menu.

LANGUAGE CONTROL - For our Spanish speaking TV owners an onsereen LANGUAGE Control is present. This control can set the TV's onscreen menut obe shown in either English or Spanish.

Sound Menu

Main

Plaza

Vicani

Protare

Protare

Men - Beytwess - Sold -

Founces for your relevation can be not the following the state of the following the foreign was also followed to the following the foreign and simply pressing the proper button.

(4) (b)

(a) (b)

2 COLOR CONTROL - Press the CUROSR RIGHT or LEFT buttons to add or eliminate color.

BRIGHTNESS CONTROL Press the CUROSR RIGHT or LEFT
buttons until darkest parts of the picture are as bright as you prefer.

To adjust your TV picture controls, select a channel and use the Picture Menu Controls listed below:

v Balance v Bass

√AVI

Once the Picture Controls are set, the TV will remember the settings. Depending on your source input (eable, VCR, DVD, etc.), or channel to channel net reception may have to be readjusted for optimum picture performance.

Normal Warm or Cool

COLOR TEMP CONTROL.

Pers the CLUSAR RIGHT of LEFT buttors to scient NORMAL, COOL, WILM MALL Will keep the whites, white: COOL will make the whites, buttors, and WARM will make the whites, buttors, reddish).

o o

Channel Edit

Program No.

Skipped

CHANNEL EDIT CONTROL - Allows you to ADD or DELETE specific channels to the TV's memory.

HELPFUL HINT

✓ Sharpness
 ✓ Sharpness

√Tint

TINT CONTROL - Press the CUROSR RIGHT or LEFT buttons to obtain natural skin tones.

AUTOPROGRAM CONTROL.

for Uncal manufacility set [see [f of word T can amountable) set [see [f of word T can amountable)] set [see [f of word T can amountable]] set [see [f o

CURSOR LEFT button on the remote control to make selections or adjustments to the selected controls.

<u>ම</u> ම ම **⊗ ⊚ ⊚** 

**(£)** 

Press the CURSOR UP or DOWN buttons on the remote to pick any of the displayed controls. Press the CURSOR RIGHT but-ton on the remote control show the selected menu's controls.

C L

Fress the STATUS/EXIT button on the remote to clear the menu from the screen after an adjustment.

You can also just wait a few seconds after you finish the fer ture adjustment and the menu will disappear from the screen automatically.

Auto Program

Channel Edit

V Program No.

Skipped

✓ Picture

SHARPNESS CONTROL - Press the CUROSR RIGHT or LEFT buttons to improve detail in the picture.

Antenna or Cable or Auto

Tuner Mode

HELPFUL HINT
There also are several Factory Preset
Sound setting within the Auto Sound
Control. Refer to panel 27 to learn how
to optimize your TV's sound for differ-
ent types of programming such as
Theatre, Music, Voice, or your
Personal setting with the touch of one

## THE SOUND MENU CONTROLS (CONTINUED)

INCREDIBLE SURROUND
COMPTOD, Press the CIROSR
RIGHT or LEFT buttons to toggle this
cortical to Steeper of Incestible Surr.
(or if mono select Mono or Spatial).
Incredible Surround will add greater
depth and dimension to the TV
sound.

Treble Bass Balance AVL Inc. Surround More...

Spatial (if in Mono) v Incr. Surround V Incr. Surround SAP CONTROL. Press the RECKOSK RIGHT or LEFT buttons to paggle the SAP control ON or OFF. Ask is short for Secondary Audio Programming and sent as a third madio chamed, a SAP signal can be heard apart from the current TV programm sound.

Incr. Surround (if in Stereo) Mono or Stereo o Ö √ SAP SOUND CONTROL. Press the CROSS REALTH - LEFF Philors to Reggle this counted from Skerce to Mann. Your I've made et a steere of signal and will set treaf nationatically secret owners are steered out of the steered steered with the steered steered with the steered steered with the transit of the many the cocasions when you might want to set the TV to morn.

The Timer controls attow you we need you we have the control of th

MER MENU CONTROLS

THET

TIME CONTROL - Enter the current time with the numbered buttons. Use the CURSOR RIGHT
button to move to the AM/PM area
and use the CURSOR RIGHT or
LEFT buttons to toggle AM/PM. 2 START TIME CONTROL - U.
2 the numbered buttons to enter a
start-up time for the TV to turn on
or to tune a specific channel.

12:30 PM Start Time Stop Time v Time STOP TIME CONTROL - Use the numbered buttons to enter a time for the TV to shut itself off.

1:30 PM Once or Daily Channel Activate CHANNEL NO. CONTROL Use the numbered buttons to select
a specific channel for the TV to
turn to at the specific Sart Time. THE CUROSR RIGHT OF LEFT buttons to togge ONCE or DALLY. Sets the Timer to preform it's finction ONCE or DALLY.

The Autology Reame is an integrated Reame is an integrated Reame is an integrated Reame in the R

their preceits.

Connect Booker, After an access coche has age described by the control of the control of their preceits.

Connect Booker, After an access coche has age described by the control of their preceived by the control of their preceived by the preceived by

TVEATINGS

IVA 1— Lossigned for a very young analizon, intaking dilution ages 2-6.

To the 1— Lossigned for a very young analizon, intaking dilution ages 2-6.

The 2-6 per ages 2-6.

The 2-7 per ages 2-6.

The 2-6 per ages 2-6.

The 2-6 per ages 2-6.

The 2-7 per ages 2-6.

The 2-6 per ages 2-6. TV4.4. — This pagam contains some material that many practs would find unsatisfie for a children moder I, syare of age? This type of the programming contains one or more of the fol-lowing; insteas volence, Oi, insteas secund sit-antions 63, strong coarse language (1, or insteas) expression of the programming contains instead suggestive dialogue (1). The TV4.4.—This program is specifically elegisped to be reased by adults and fleering may be unsatiable for children under 1.7 This type of programming contains one or more of the following: graphic violence (V), explicit sound studies. General Audience. All ages admitted.
General Audience. All ages admitted.
Most purents would find this program suit—
able for all ages.
Pec! Purental Guidance Suggested This programming contains matchial that purents may find usualishe for younge children.
Pec! 15 Purents Sucongly Cautioned - This
programming contains matchial that purents
may find usualishe for children that purents
may find usualishe for children that of the contains matching that purents
may find usualishe for children under the age
of 13.

## CREATING AN ACCESS CODE FOR AUTOLOCK<sup>TM</sup> Over the next few panels you'll learn how to black channels and get a better are greater and get a per certain programming. First, let's start by learning how to set a personal access code:

How to BLOCK CHANNELS WITH AUTOLOCK TM

Press the MENU button on the remove to display the on-seven menu.


Press the CURSOR the on-seven menu.


Press the CURSOR the on-pown and a partial ment of the word FEATURES in the set of cursor REHT URES menu options.


Press the CURSOR RICHT button for display the FEATURES menu options.


Press the CURSOR RICHT button that of the cursor of the cursor


Chair, the WIMBERED buttons, of enter 0, 7, 1, 1, 2xXXX appeas on the Access Code screen as you press the numbered buttons. By our press the numbered buttons. By our press the numbered buttons are numbered buttons on the screen and you will meet for enter 0, 7, 1, 1 again the code using the NUMBERED buttons. The screen will then ask you to CONFIRM the code you just the code when the code is not not considered the present the code of t



















Cleared

























ATLANTA
Philips Factory Service
550 Franklin Road.,
Suite F
Marietta, GA 30067
800-273-1501

Repeat steps 1-3 for the other three COLORED buttons (Surflists) if desired.

Any for the "surging" face appears with the channel number, pressing the "frownie" face button will allow you to know of it from the list (see the previous page for more details).

2.0

690 000 0000 000 000 0000 000 000 0000

Repeat steps 1 through 3 to add additional alchameds up to 1(0) to each of the the SURF lists.

To remove a channel from one of the SURF lists.

To remove a channel from one of the SURF lists.

Surf button until the desired channel channel and along the channel tumber with a colored Suiley free to make a too forced button it relates to Colored button it relates to Colored button it relates to Colored button it relates to Surfey free to make a finder or a displayed, press the ROWNER © face button. The sereen will read, "Remove liem?" Press to G. "Press the ROWNER © face button. The press the ROWNER © face button. The press the ROWNER © face button. The press the ROWNER © face button in the state of the surfer is the surfer of the surfer is the surfer in confirm your decision to remove the channel from the Surfer list.

NOTE. If you reside in one of our Philips Factory Service Branch areas (see directory on back), you can ontart the nestest Stirche Battorh to both with the restest Stirche Battorh to both with the restest Stirche Battorh to both in the rest stirched by the product! Hours broad-d-burdase to ensure the product! Hours broad-d-burdase to ensure the product! Hours broad-d-burdase to ensure the foreign service and the resting and the service applies where the destruction of the product of the product of the service applies where the product service applies where the pure service applies where the product service applies where the product sometime the pure of calculations. So is product as sons garantie, a suffir de presenting the service applies destructions.

NOTA: Si Un reside en una de mestras zonas para sourcaties Philips de servicion als certains para about the canada assuranties described may be entre consideration operation operation and expendit of the fabric and para destruction. All defe presented comprisates on expension obsiding the analysis of the page and the product of servicion and the page and the page and the defer presenter comprobate de comprapara no obsiding land and indicators.

TAMPA

1911 US Highway 201
1911 US Highway 201
18mpa, F. 13819

In Canada: How you can obtain efficient and expedient carry-in, mail-in, or in-home service for your product. Please contact Philips at: 1-800-66 (162 (French streaking))

Au Canada: Comment obtemir le service aptes-venire pour les produits apportés ou envoyés par la poste à notre centre de service au les service à dominicile.

Pauliez contacter philips á: 1-800-666 -156 (Frencophore) 1-800-666 -156 (Frencophore)

En el Canadá: Como reobir servicio efficiente para su production en presson, por correro o a dominicile. Fevor de comunicarse con Philips at: 1-800-666 -152 (Francofton)

CHICAGO
Philips Factory Service
1279 W. Hamilton Pkwy.
Itasca, IL 60143
800-531-2922

#107 Euless, TX 76040 800-952-3254

Ŋ

Assuming channels have now been added to the Rey on Qualsh 2014 lists the four conditions, see the provints peach, let's review how the feature vorists.

Press once of the pre-programmed COLARD buttons on the romoe Red, Green, 'Adlow or Bilen). The sees well display as simply face with the first programmed channel for that aff its, or the sees well display as miley face will the same COLARD button on the same COLARD button on the same COLARD button on the propers on the sevent press the same COLARD button on the promote to me the second channel programmed for that specific and list greated by pressing the same COLARD button while the "miley" of RegD button while the "miley" of summed channels, Pressain the COLARD button is well the list channel in the list.

If the "samily" line despreas from the secreta and the same COLORED button is pressed, the safely line displayed sattings with the FRIST programmed channel again.

22

THEATRE - Preset sound options for watching movies.

MUSIC - Preset sound options for musical programming where there is little dalaque.

VOICE - Preset sound options for programming where there is present.

Accied

<u>0</u>

The QuadraSurPa control allows you are to up up our different personal channel and its suiting the colored buttons (on the remove control), each building up to the channel of the colored buttons (on the remove control), each colored button to colored the CHANNEL (+) or (+) button control of the CHANNEL (+) or (+) button control of the CHANNEL (+) or (+) button control of the CHANNEL (+) or (+) button on the control of the CHANNEL (+) or (+) button on the to control of the CHANNEL (+) or control of the CHANNEL (

Personal

Press the AUTO SOUND button on the remote control. The current Auto Sound setting will appear in the middle of the screen.

Press the AUTO SOUND button repeatedly to toggle between the four settings. (PERSONAL, THE-ATRE, MUSIC, or VOICE)

Note: The way you choose to set the Sound Menu Controls will become yo PERSONAL setting.

T he Auto Sound feature allows the listener to select between four different factory set sound options.

12

) (8)

**©** 33

**@** 41 **@**29

USING THE CLOSED CAPTION CONTROL Closed Capitaning (CC) allows you to pread the vacation of the fixed programs on the TV screen. Designed to help the hearing impaired, this feature uses one-secret "Lext boxes" to show dupleye and convexations while the TV program is in progress.

OTHER AUTOLOCK<sup>TM</sup> BLOCKING OPTIONS

RAMS BASED ON TV RATINGS

22 BLOCK PROG

BLOCK PROGRAMS BASED ON MOVIE RATINGS

The AuoLock<sup>TM</sup> feature can block pi gramming based on the TV Industry ings.

Once you've entened your access code of the AutoLock<sup>TM</sup> features are displayed to

The AutoLock<sup>NA</sup> feature can block programming based on the Movie Industry varing. Once you've enerved your access code and the AutoLock<sup>NA</sup> features are displayed on the screen:

Press the CURSOR UP or DOWN button to highlight the words MOVIE RATING.

Press the CURSOR RIGHT button to display the MOVIE RATING options (G, PG, PG-13, R, NC17, or X).


DISPLAY CONTROL - Press the CUROSK BUGILT or LETP buttons to toggle ON or OFF. When ON, the time will be displayed ALL the time the TV is on If OFF is selected, the time will only appear when the STATUS /EXIT button is pressed.

A undrock<sup>180</sup> offers the viewer other
Abhoching features as well. With these
Blucking Options, the censoring can be
nurned ON or OFF,
on you've embered your access code
and the Auth-cock<sup>280</sup> features are displayed on the screen:

Press the CURSOR UP or DOWN buttons until the words BLOCK-ING OPTIONS are highlighted.

USING THE SLEEPTIMER CONTROL

Press the SLEEP button repeated-ly to pick the amount of time (15, 30, 45, 60, 90, 120, 180, or 240 minutes) before the TV will turn iself off. Press the SLEEP button on the remote control and the SLEEP time display will appear on the screen.  $\sum$  our TV can be set to automatically turn itself off at a given amount of 0000



Press the CC button repeatedly to choose from the four Closed Caption options (CC Off, CC 1, CC 2, CC Mute).

When finished, press the STATUS /EXIT button to remove the menu from the TV's screen.

Press the CURSOR RIGHT button to display the Bucking
Options (BLOCKING, UNRAT
ED, or NO RATING) ment.
BLOCKING: Alther called the 'master swith' for AndoLock'''s When ON,
ALL Delecking-cursoring will take place.
When OFF ALL Decking is deabled.
UNRATED ALL unextured programs
UNRATED ALL unextured programs
UNRATED ALL unextured programs
(TVD Guidelines can be blocked if this
feature is set to OFF.

G ► Block All, V, S, L, D

t ► Block All, V, S, L, D

▶ Block All, FV

Block All, V, S, L

Press the CURSOR UP or DOWN Movie Rating options. When high-lighted, all these options can be turned ON (which will allow block-turned ON (which will allow viewing) or OFF (which will allow viewing).

7

NO RATING: ALL programming with NO content advisory data can be blocked if set to ON and the BLOCKING feature is set to OFF.

When highlighted, each feature can be turned ON or OFF using the CURSOR RIGHT or LEFT buttons on the remote.

Press the CURSOR UP or DOWN buttons to highlight the desired feature.

749

~ ~ u


4

When a rating level is chosen to be blocked, any higher level rating will also be blocked from viewing, (i.e., If "R" is selected to be blocked, NC-17 and X will automatically be blocked,

NOTE: If you ever forget your code, the 0, 7, 1, 1 code is the factory default and can be used to enter and create a new access code.

Use the CURSOR RIGHT button on the remote to turn the rating option ON or OFF.

Press the CC button on the remote to display the current Closed Caption setting.



How to Use the Quadra Sure TM Buttons

THE QUADRASURFTM BUTTONS

28 How to USE

USING THE AUTOSOUND<sup>TM</sup> CONTROL

(D)

The Quada Surf humons on your renice control allow you to store up to 10 channels by humon (40 tual). You can even program the AVI tupur channels (AVI AVI SPONT etc.) for each button making them a "source" button.

COLOR TELEVISION - 90 Days Free Labor, One Year Free Repbrement of Par (Two Years Free Replacement on Color Picture Tube) Must be carried in for servic

LIMITED WARRANTY

COMMENT ORTHER NOTITE SERVICE, APRÈS VERITE RAPICES CENT PAR COURREIR, À DOMOLILE, DU EN SE PRÉSENTANT À LOS TREIN DES RESPUEZATIONE SE RAPICE PROFESSES DE RÉSENTIONE DE PRODUITE DE PROSITIONE DE PRODUITE DE LES CONTRETS DE RÉSENTIONE PRODUITE DE PROSITIONE DE PRODUITE DE RESPUEZATIONE DE LA CONSUMENTIES ET PROSITIONE SAUDIONE L'ORDINE DE REPUEZATIONE DE LA CONTRETE DE REPUEZATIONE DE PRODUITE DE REPUEZATIONE DE PROGUEDATIONE DE PROGUEDATIONE DE PROFESSE DE REPUEZATIONE DE PROGUEDATIONE DE PROGUEDATIONE DE PROFESSE DE PROFESSE DE PROGUEDATIONE SE COMMENSATIONE DE PROFESSE DE PROGUEDATIONE DE PROFESSE DE PROFESSE

KNOXVILLE
Philips Tactory Service
S700 D Papermill Rd
Knoxville, TN 37919
800-821-1767
PHILADELPHIA
Philips Tactory Service
352 Dunks Ferry Rd
Bensatem, PA 19020 CLEVELAND
Philips Factory Service
950 Keynote Circle
Brooklyn Heights, OH
44131
800-331-7037 DETROIT
Philips Factory Service
25173 Dequindre
Madison Heights, MI DALLAS Philips Factory Service 415 N. Main Street, #107 48071 800-438-1398

Common Betteroid Common Betteroid Common when Piles Common Betteroid Common with the Piles Common Betteroid Common or organization will attent to provide service organization will attent to be not Piles and the Piles Common Betteroid Betteroid Common Betteroid I-800-66 I-6 162 (French Speaking) I-800-53 I-003 9 (English and Spanish Speak WHO IS COVERED richies to reside sortine to great the property of purelsas.

Provided and the product is considered to provide the product is considered to product in the product of the property of purelsas.

WHAT IS COVERED the product is considered to which the product is considered to the product of th

REMEMBER...
on the product before the model and serial numbers found on the product before. Mac please fill out and mail your warranty registration card promptly. It will be easier for us to notify you if necessary.

This warrang gives you specific legal rights. You may haw other rights which vary from statelprovince to statelprovin Other rights. P.O. Box 520890